



SASO CATALOG

Less Power ... More Light

SASO

Powered by
EG.Light
EL SEWEDY

EG.Light is a trusted Egyptian LED lighting manufacturer, delivering excellence since 2019. We combine innovation, quality, and exceptional value to illuminate your world.

Our Solutions

We offer smart, energy-efficient lighting solutions tailored for various environments:

Indoor Lighting: From elegant downlights to everyday functional spaces.

Outdoor & Industrial Lighting: High-performance solutions, including robust street lights.



Our Premium Product Lines


To meet diverse market needs with maximum efficiency, we offer two specialized product lines:

SASO

MIKANO

Our Products

OUTDOOR



STREET LIGHT

Brightening paths,
securing communities



FLOOD LIGHT


Massive power for
grand spaces.



LANDSCAPE

Bringing your gardens
to life

INDOOR




DOWNLIGHT

Sleek design,
seamless brightness.



DECORATIVE

Shaping walls with light
and shadow.
Bringing your gardens
to life.



INDUSTRIAL

Built to endure, engineered
to perform.

INDUSTRIAL

DECORATIVE

DOWNLIGHT

INDOOR





SASO

SURFACE PLAFONIERA

LED surfaced plafoniera designed for **indoor applications**, offering soft, uniform light with minimal glare.

Ideal for offices, homes, and commercial spaces, energy-efficient and easy to install for modern ceilings.



POWER	CCT	CRI	IP	Lumen	PF	Warranty
24W	3000K - 4000K - 6500K	70	44	2400	≥0.90	2
36W	3000K - 4000K - 6500K	70	44	3600	≥0.90	2
48W	3000K - 4000K - 6500K	70	44	4800	≥0.90	2

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** PC \ DIE-CAST AL

- **DRIVER TYPE :** ELSEWEDY
- **CHIP TYPE:** EPISTAR - SANAN
- **DIFFUSER:** OPAL PC



RECESSED PLAFONIERA //

LED surfaced plafoniera designed for **indoor applications**, offering soft, uniform light with minimal glare.

Ideal for offices, homes, and commercial spaces, energy efficient and easy to install for modern ceilings.



Power	CCT	CRI	IP	Lumen	PF	Warranty
24W	3000K - 4000K - 6500K	70	44	2400	≥0.90	2
36W	3000K - 4000K - 6500K	70	44	3600	≥0.90	2
48W	3000K - 4000K - 6500K	70	44	4800	≥0.90	2

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** PC \ DIE-CAST AL

- **DRIVER TYPE :** ELSEWEDY
- **CHIP TYPE:** EPISTAR - SANAN
- **DIFFUSER:** OPAL PC



SASO

RECESSED DOWNLIGHT

Recessed led downlight designed for indoor applications, offering soft, uniform light with minimal glare.

Ideal for offices, homes, and commercial spaces, energy efficient and easy to install for modern ceilings.



Power	CCT	CRI	IP	Lumen	PF	Warranty
6w	3000K - 4000K - 6500K	70	44	600	≥0.90	2
12w	3000K - 4000K - 6500K	70	44	1200	≥0.90	2
18w	3000K - 4000K - 6500K	70	44	1800	≥0.90	2
24w	3000K - 4000K - 6500K	70	44	2400	≥0.90	2

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** PC

- **DRIVER TYPE :** ELSEWEDY
- **CHIP TYPE:** EPISTAR - SANAN
- **DIFFUSER:** OPAL PC

SASO

SPOT COB

High-efficiency LED COB spot available in **7W to 36W**, delivering focused, uniform lighting. Ideal for accent and display lighting with excellent color rendering. Sleek design for modern indoor applications.



Power	CCT	CRI	IP	Lumen	PF	Warranty
7w	3000K - 6500K	80	44	700	≥0.90	2
10w	3000K - 6500K	80	44	1000	≥0.90	2
15w	3000K - 6500K	80	44	1500	≥0.90	2
20W	3000K - 6500K	80	44	2000	≥0.90	2
30W	3000K - 6500K	80	44	3000	≥0.90	2
36W	3000K - 6500K	80	44	3600	≥0.90	2

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** PC \ DIE-CAST AL

- **DRIVER TYPE :** ELSEWEDY
- **CHIP TYPE:** EPISTAR - SANAN
- **DIFFUSER:** GLASS



SASO

LED BULB

High-Efficiency E27 LED Bulbs
available in **9W to 55W**
for Seamless Retrofit Fixtures,
Delivering Significant Energy
Savings and Minimized Initial
Investment.



Power	CCT	CRI	IP	Lumen	PF	Warranty
9w	3000K - 6500K	80	20	900	≥ 0.5	3
12w	3000K - 6500K	80	20	1200	≥ 0.5	3
15w	3000K - 6500K	80	20	1500	≥ 0.5	3
25W	3000K - 6500K	80	20	2500	≥ 0.5	3
35W	3000K - 6500K	80	20	3500	≥ 0.5	3
45W	3000K - 6500K	80	20	4500	≥ 0.5	3
55W	3000K - 6500K	80	20	5500	≥ 0.5	3

- **MAIN VOLTAGE :** 220 - 240 VAC
- **BODY MATERIAL:** PC

- **MAIN FREQUENCY:** 50 \ 60 HZ
- **DIFFUSER:** PC



SASO

GYPTO

Durable **60×60 LED** backlight panel powered by high-performance components for stable, energy efficient lighting. comes with **2 or 3 years warranties** upon request built for reliability and durability .



Power		CCT	CRI	IP	Lumen	PF	Warranty
48w		3000K - 4000K - 6500K	80	44	4800	≥0.60	2
48w		3000K - 4000K - 6500K	80	44	4800	≥0.90	3

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** SM HOUSING + AL FRAME

- **DRIVER TYPE :** ELSEWEDY
- **CHIP TYPE:** EPISTAR - SANAN
- **DIFFUSER:** OPAL PC



CLEAN ROOM

Clean Room is a LED BACKLIGHT **PANEL 60X60** available in **42W** that can be used as an ANTI BACTERIA housing due to its high -performance components for stable, energy-efficient lighting, high IP rate .



Power	CCT	CRI	IP	Lumen	PF	Warranty
42w	3000K - 4000K - 6500K	80	65	4200	≥0.90	3

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** AL FRAME

- **DRIVER TYPE :** PHILIPS - OSRAM - DONE - LEFUID
- **CHIP TYPE:** PHILIPS - OSRAM - SANAN
- **DIFFUSER:** OPAL PC



SASO

STREAM WATERPROOF

LED Waterproof lighting product compatible with **T8 lamps** , available in **60 and 120 cm** , ideal for dusty environments , splash resistant and high illumination lighting for **industrial and commercial** (like parking areas) use.



Power	CCT	Lumen	IP	SIZE
2 x 9w	3000K - 4000K - 6500K	1800	65	60CM
2 x 18w	3000K - 4000K - 6500K	3600	65	120CM
1 x 18w	3000K - 4000K - 6500K	1800	65	120CM

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** PC
- **DIFFUSER:** OPAL PC



SASO

LED TUBE

LED Tube available in **60 cm \ 120 cm** ,
ideal for dusty environments reliable ,
splash resistant and high illumination
lighting for **industrial and commercial**
use.



Power		CCT	CRI	IP	Lumen	PF	Warranty
9w		3000K - 4000K - 6500K	80	20	900	≥0.6	2
18w		3000K - 4000K - 6500K	80	20	1800	≥0.6	2
9w		3000K - 4000K - 6500K	80	20	900	≥0.90	3
18w		3000K - 4000K - 6500K	80	20	1800	≥0.90	3

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ

- **CHIP TYPE:** EPISTAR - SANAN
- **DIFFUSER:** OPAL PC



LED TRI PROOF

LED Triproof lighting fixture equipped with integrated LED modules or strips, available in **60 cm and 120 cm**. Delivers uniform, energy-efficient lighting, with a modern shape, perfect for humid or dusty environments like **garages, workshops, and warehouses**.



Power	CCT	CRI	IP	Lumen	PF	Warranty
20w	3000K - 4000K - 6500K	80	65	2400	≥0.90	3
40w	3000K - 4000K - 6500K	80	65	4800	≥0.90	3
70w	3000K - 4000K - 6500K	80	65	8400	≥0.90	3

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** PC


- **DRIVER TYPE :** ELSEWEDY - EAGLERIS
- **CHIP TYPE:** LUMILED - SANAN
- **DIFFUSER:** OPAL PC



LINEAR LED

Linear pro customized upon requests , delivering nice and decorative illumination with high performance , perfect for **indoor spaces**

MANUFACTURING AS PER MODEL AND REQUIRED LENGTHS

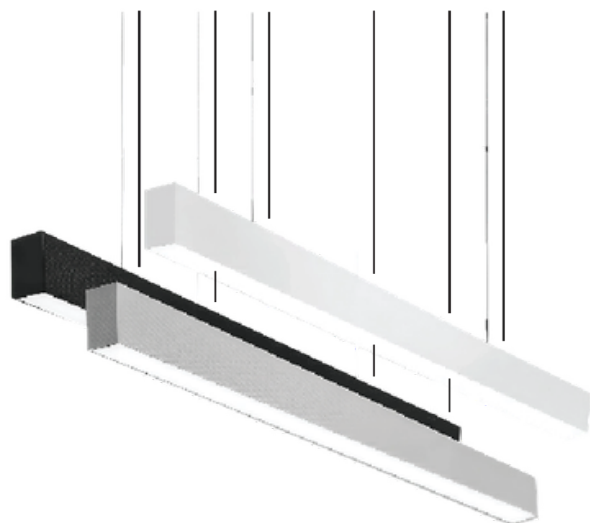

Power	CCT	CRI	IP	LM\W	PF	Warranty
15 : 45)w\m	3000K - 4000K - 6500K	80	20- 42	100	≥0.90	2-3

- **MAIN VOLTAGE :** 24-12 V
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** ALUMIUM \ STEEL

- **POWER SUPPLY :** ELSEWEDY
- **CHIP TYPE:** SANAN
- **DIFFUSER:** OPAL PC



SASO

CIRCULAR LED

Circular LED pro le customized upon requests , delivering nice and decorative illumination with high performance , perfect for **indoor spaces**

MANUFACTURING AS PER MODEL AND REQUIRED LENGTHS



Power	CCT	CRI	IP	LM\W	PF	Warranty
(15 : 45)w\m	3000K - 4000K - 6500K	80	20- 42	100	≥0.90	2-3

- **MAIN VOLTAGE :** 24V
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** ALUMIUM \ STEEL

- **POWER SUPPLY :** ELSEWEDY
- **CHIP TYPE:** SANAN
- **DIFFUSER:** OPAL PC



BULKHEAD

Surface-mounted residential and hotel lighting featuring standard wall-fixed lamps for **stairs, balconies, homes, hotels, computer rooms, offices, waiting areas, and villas.**



Power	CCT	CRI	IP	Lumen	PF	Warranty
-	-	-	65	-	≥0.6	-

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE CAST ALUMIUM
- **DRIVER TYPE :** -
- **CHIP TYPE:** -
- **DIFFUSER:** PC \ TP GLASS



HIGH BAY (LASER)

Powerful LED highbaylighting designed for **warehouses, factories, and large indoor or outdoor spaces**. Delivers high-lumen output with energy efficiency and long-lasting performance.



Power	CCT	CRI	IP	Lumen	PF	Warranty
100w	6500K	80	66	13000	≥0.90	3
150w	6500K	80	66	19500	≥0.90	3
200w	6500K	80	66	26000	≥0.90	3

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE-CAST ALUMIUM

- **DRIVER TYPE :** ELSEWEDY - SUNCOM - ZH
- **CHIP TYPE:** PHILIPS - OSRAM - SANAN
- **DIFFUSER:** OPAL PC



HIGH BAY (LASER)

Powerful LED highbaylighting designed for **warehouses, factories, and large indoor or outdoor spaces**. Delivers high-lumen output with energy efficiency and long-lasting performance.



Power	CCT	CRI	IP	Lumen	PF	Warranty
100w	6500K	80	66	13000	≥0.90	3
150w	6500K	80	66	19500	≥0.90	3
200w	6500K	80	66	26000	≥0.90	3


- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE-CAST ALUMIUM

- **DRIVER TYPE :** ELSEWEDY - SUNCOM - ZH
- **CHIP TYPE:** PHILIPS - OSRAM - SANAN
- **DIFFUSER:** OPAL PC



HIGH BAY (E-MARS)

Powerful LED highbaylighting designed for **warehouses, factories, and large indoor or outdoor spaces**. Delivers high-lumen output with energy efficiency and long-lasting performance.

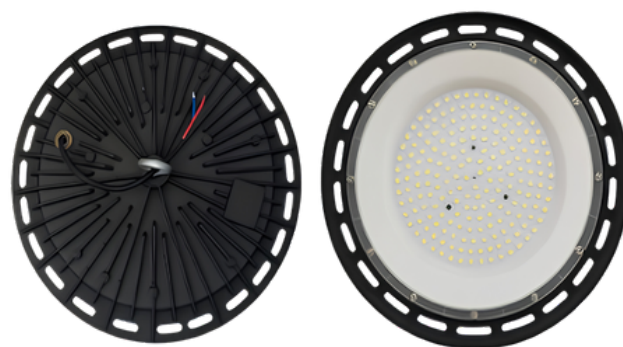

Power	CCT	CRI	IP	Lumen	PF	Warranty
100w	6500K	80	65	12000	≥0.70	2
150w	6500K	80	65	18000	≥0.70	2
200w	6500K	80	65	24000	≥0.70	2

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE-CAST ALUMIUM

- **DRIVER TYPE :** DOB
- **CHIP TYPE:** SANAN
- **DIFFUSER:** OPAL PC



HIGH BAY E-LUX

Powerful LED highbaylighting designed for **warehouses, factories, and large indoor or outdoor spaces**. Delivers high-lumen output with energy efficiency and long-lasting performance.



Power	CCT	CRI	IP	Lumen	PF	Warranty
100w	6500K	80	66	12000	≥0.70	2
150w	6500K	80	66	18000	≥0.70	2
200w	6500K	80	66	24000	≥0.70	2

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE-CAST ALUMIUM

- **DRIVER TYPE :** DOB
- **CHIP TYPE:** SANAN
- **DIFFUSER:** OPAL PC

SASO

LED STRIP

LED strip for decorative ambient light , easy to install ,consists of 240 chip per meter for maximum **output and best illumination**



Power	CCT	CRI	IP	LM\W	Warranty
15w/m	3000K - 4000K - 6500K	80	20	85	3

- **MAIN VOLTAGE :** 220 - 240 VOLT
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** SILICON TUBE COPPE(CU)
- **CHIP TYPE:** SANAN

STREET LIGHT

OUTDOOR



FLOOD LIGHT



LANDSCAPE





SASO

STREET LIGHT

Durable and efficient streetlight that uses SMD as a light source designed for **reliable outdoor** performance, offers consistent illumination with a **3 years warranty** ideal for cost effective urban and **commercial lighting solutions**



Power	CCT	CRI	IP	Lumen	PF	Warranty
100w	6500K	80	66	13000	≥0.9	3
150w	6500K	80	66	19500	≥0.9	3
200w	6500K	80	66	26000	≥0.9	3

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE CAST ALUMIUM

- **DRIVER TYPE :** PHILIPS - ELSEWEDY - MOSO
- **CHIP TYPE:** PHILIPS - SANAN
- **DIFFUSER:** TP GLASS

SASO

RAYLIT STREET LIGHT

Durable and efficient streetlight that uses SMD as a light source designed for reliable outdoor performance, offers consistent illumination with a **2 - 3 years warranty** ideal for cost effective **urban and commercial lighting solutions**



Power	CCT	CRI	IP	Lumen	PF	Warranty
50w	6500K	80	66	6500	≥0.9	2-3
100w	6500K	80	66	13000	≥0.9	2-3
150w	6500K	80	66	19500	≥0.9	2-3
200w	6500K	80	66	26000	≥0.9	2-3

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE CAST ALUMIUM

- **DRIVER TYPE :** ELSEWEDY
- **CHIP TYPE:** SANAN
- **DIFFUSER:** PC



SASO

STREET LIGHT SMD

Durable and efficient streetlight that uses SMD as a light source designed for reliable outdoor performance, offers consistent illumination with a **2 years warranty** ideal for cost effective **urban and commercial lighting solutions**



Power	CCT	CRI	IP	Lumen	PF	Warranty
100w	6500K	80	66	10000	≥0.9	2
150w	6500K	80	66	15000	≥0.9	2
200w	6500K	80	66	20000	≥0.9	2

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE CAST ALUMIUM

- **DRIVER TYPE :** ELSEWEDY
- **CHIP TYPE:** SANAN
- **DIFFUSER:** PC



SASO

STREET LIGHT COB

Durable and efficient streetlight that uses COB as a light source designed for reliable outdoor performance, offers consistent illumination with a **2 years warranty** ideal for cost effective **urban and commercial lighting solutions**



Power	CCT	CRI	IP	Lumen	PF	Warranty
100w	6500K	80	66	10000	≥0.9	2
150w	6500K	80	66	15000	≥0.9	2
200w	6500K	80	66	20000	≥0.9	2

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE CAST ALUMIUM

- **DRIVER TYPE :** ELSEWEDY
- **CHIP TYPE:** SANAN
- **DIFFUSER:** TP GLASS \ PC



SASO

MARIO

Durable and efficient streetlight that uses SMD as a light source designed for reliable outdoor performance, offers consistent illumination with a **2-3 years warranty** ideal for cost effective **urban and commercial lighting solutions**



Power	CCT	CRI	IP	Lumen	PF	Warranty
100W	6500K	80	66	13000	≥0.95	2-3
150W	6500K	80	66	19500	≥0.95	2-3
200W	6500K	80	66	26000	≥0.95	2-3

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE CAST ALUMIUM

- **DRIVER TYPE :** ELSEWEDY
- **CHIP TYPE:** SANAN
- **DIFFUSER:** TP GLASS



BEAMMAX

BEAMMAX is a Durable and efficient streetlight that uses SMD as a light source designed for reliable outdoor performance, offers consistent illumination with a **2 years warranty** ideal for cost effective **urban and commercial lighting solutions**



Power	CCT	CRI	IP	Lumen	PF	Warranty
100w	6500K	80	66	13000	≥0.95	2
150w	6500K	80	66	19500	≥0.95	2
200w	6500K	80	66	26000	≥0.95	2

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE CAST ALUMIUM

- **DRIVER TYPE :** ELSEWEDY
- **CHIP TYPE:** SANAN
- **DIFFUSER:** PC



SASO

MASRSILIA

Bikasuflood LED light delivers high-output illumination suitable for cost-effective and budget-conscious projects, backed by **2-3 years warranty** and suitable for **outdoor and general use**.



Power	CCT	CRI	IP	Lumen	PF	Warranty
50w	3000K - 6500K	80	66	5000	≥0.90	2-3
100w	3000K - 6500K	80	66	10000	≥0.90	2-3
150w	3000K - 6500K	80	66	15000	≥0.90	2-3
200w	3000K - 6500K	80	66	20000	≥0.90	2-3
300w	3000K - 6500K	80	66	30000	≥0.90	2-3
400w	3000K - 6500K	80	66	40000	≥0.90	2-3

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE CAST ALUMIUM

- **DRIVER TYPE :** ELSEWEDY CHIP
- **TYPE:** SANAN
- **DIFFUSER:** TP GLASS



SASO

D-SPARK

FloodLEDlight delivering high-output illumination, cost-effective for budget-conscious projects, backed by a **2-year warranty** and suitable for **outdoor and general use**.



Power	CCT	CRI	IP	Lumen	PF	Warranty
50w	3000K - 6500K	80	66	500	≥0.8	2
100w	3000K - 6500K	80	66	10000	≥0.8	2
150w	3000K - 6500K	80	66	15000	≥0.8	2
200w	3000K - 6500K	80	66	20000	≥0.8	2
400w	3000K - 6500K	80	66	40000	≥0.8	2

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE CAST ALUMIUM

- **DRIVER TYPE :** DOB
- **CHIP TYPE:** SANAN
- **DIFFUSER:** TP GLASS



SPARK

Reliable flood light offering strong performance, Ideal for cost-conscious projects, it comes with **3 years warranty** and delivers good quality lighting for **outdoor and general use**.



Power	CCT	CRI	IP	Lumen	PF	Warranty
100w	3000K - 6500K	80	66	13000	≥0.90	3
150w	3000K - 6500K	80	66	19500	≥0.90	3
200w	3000K - 6500K	80	66	26000	≥0.90	3
300w	3000K - 6500K	80	66	39000	≥0.90	3
400w	3000K - 6500K	80	66	52000	≥0.90	3

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE CAST ALUMINIUM

- **DRIVER TYPE :** ELSEWEDY
- **CHIP TYPE:** SANAN
- **DIFFUSER:** TP GLASS



SASO

FLOOD LIGHT

LED flood light delivers high-output illumination suitable for cost-effective and budget-conscious projects, backed by **3 years warranty** and suitable for **outdoor and general use**.



Power	CCT	CRI	IP	Lumen	PF	warranty
150 w	6500K	80	65	19500	≥0.90	3
200 w	6500K	80	65	26000	≥0.90	3

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE-CAST ALUMIUM
- **BElictrical Protections :** OVP / OTP

- **DRIVER TYPE :** Philips
- **CHIP TYPE:** PHILIPS - Lumiled
- **DIFFUSER:** Glass



WALL APPLIQUE

Modern double wall applique with dual light sources for balanced up-and-down illumination. Adds elegance and depth to both interior and exterior walls. Ideal for **ambient and decorative lighting**.



Power	CCT	CRI	IP	Lumen	PF	Warranty
2*2w	3000K	70	65	280	0.60	2
3*2w	3000K	70	65	420	0.60	2

• MAIN VOLTAGE : 220 - 240 VAC

• MAIN FREQUENCY: 50 \ 60 HZ



SASO

UP & DOWN

LEDUp & Downwall light , ideal for **indoor and outdoor use** , features high IP rating for weather resistance and dual-beam **illumination with Sleek design**



Power	CCT	CRI	IP	Lumen	PF	Warranty
2*5w	3000K	80	65	700	≥0.6	2
2*7w	3000K	80	65	980	≥0.6	2
2*9w	3000K	80	65	1260	≥0.6	2

• **MAIN VOLTAGE :** 220 - 240 VAC

• **MAIN FREQUENCY:** 50 \ 60 HZ



SASO

UP & DOWN

LEDUp & Downwall light , ideal for **indoor and outdoor use** , features high IP rating for weather resistance and dual-beam **illumination with Sleek design**



Power	CCT	CRI	IP	Lumen	PF	Warranty
2*5w	3000K	80	65	700	≥0.6	2
2*7w	3000K	80	65	980	≥0.6	2

• **MAIN VOLTAGE :** 220 - 240 VAC

• **MAIN FREQUENCY:** 50 \ 60 HZ



SASO

GLOBE

Features a versatile E27 holder that supports bulbs of **various wattages** and color temperatures (warm, cool, or daylight) to **customize your lighting ambiance**.



Φ	CCT	CRI	IP	Lumen	PF	Warranty
25 cm	-	-	65	-	-	-
30 cm	-	-	65	-	-	-

- **MAIN VOLTAGE :** 220 - 240 VAC
- **BODY MATERIAL:** ALUMINIUM \ PC

- **MAIN FREQUENCY:** 50 \ 60 HZ
- **DIFFUSER:** OPAL PC



SASO

GLOBE

Features a versatile E27 holder that supports bulbs of **various wattages** and color temperatures (warm, cool, or daylight) to **customize your lighting ambiance**.



Φ	CCT	CRI	IP	Lumen	PF	Warranty
25 cm	-	-	65	-	-	-
30 cm	-	-	65	-	-	-

- **MAIN VOLTAGE :** 220 - 240 VAC
- **BODY MATERIAL:** ALUMINIUM \ PC

- **MAIN FREQUENCY:** 50 \ 60 HZ
- **DIFFUSER:** OPAL PC



SASO

LED SPIKE COB

Elegant LEDspike lightdesignedto provide smooth, ambient background lighting between landscape areas. Perfect for **enhancing pathways, gardens, and outdoor features** with a subtle, modern touch.



Power	CCT	CRI	IP	Lumen	PF	Warranty
7w	3000K	70	65	490	≥0.6	2
10w	3000K	70	65	700	≥0.6	2
12w	3000K	70	65	840	≥0.6	2
15w	3000K	70	65	1050	≥0.6	2
20w	3000K	70	65	1400	≥0.6	2

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE CAST ALUMIUM

- **DRIVER TYPE :** BUILT-IN
- **CHIP TYPE:** SANAN
- **DIFFUSER:** TP GLASS



LED SPIKE SMD

Elegant LEDspike lightdesignedto provide smooth, ambient background lighting between landscape areas. Perfect for **enhancing pathways, gardens, and outdoor features** with a subtle, modern touch.



Power	CCT	CRI	IP	Lumen	PF	Warranty
7w	3000K	70	65	490	≥0.6	2
12w	3000K	70	65	840	≥0.6	2
15w	3000K	70	65	1050	≥0.6	2
24w	3000K	70	65	1680	≥0.6	2

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE CAST ALUMIUM

- **DRIVER TYPE :** BUILT-IN
- **CHIP TYPE:** SANAN
- **DIFFUSER:** TP GLASS

SASO

UP LIGHT COB

Ground- xedLEDuplightdesigned to highlight architectural elements and trees with precision using its lenses to deliver wide beam angle. Delivers powerful upward illumination while blending seamlessly into **outdoor landscapes**.



Power	CCT	CRI	IP	Lumen	PF	Warranty
3w	3000K	80	65	210	≥0.6	2
5w	3000K	80	65	350	≥0.6	2
7w	3000K	80	65	490	≥0.6	2
10w	3000K	80	65	700	≥0.6	2
15w	3000K	80	65	1050	≥0.6	2
20w	3000K	80	65	1400	≥0.6	2
30w	3000K	80	65	2100	≥0.6	2

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE CAST ALUMIUM

- **DRIVER TYPE :** BUILT-IN
- **CHIP TYPE:** SANAN
- **DIFFUSER:** TP GLASS

SASO

UP LIGHT

Ground- xedLEDuplight designed to highlight architectural elements and trees with precision using its lenses to deliever wide beam angle. Delivers powerful upward illumination while blending seamlessly into **outdoor landscapes**.



Power	CCT	CRI	IP	Lumen	PF	Warranty
3w	3000K	80	65	210	≥0.6	2
5w	3000K	80	65	350	≥0.6	2
7w	3000K	80	65	490	≥0.6	2
10w	3000K	80	65	700	≥0.6	2
15w	3000K	80	65	1050	≥0.6	2
20w	3000K	80	65	1400	≥0.6	2
30w	3000K	80	65	2100	≥0.6	2

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- BODY MATERIAL:** DIE CAST ALUMIUM

- **DRIVER TYPE :** BUILT-IN
- **CHIP TYPE:** SANAN
- **DIFFUSER:** TP GLASS



SASO

SIDE UPLIGHT

Sideuplightdesigned forground or wall-end installation, offering dramatic upward illumination. Perfect for highlighting **architectural features and landscape** elements. Durable and sleek for **outdoor use**.



Power	CCT	CRI	IP	Lumen	PF	Warranty
3w	3000K	80	65	210	≥0.6	2

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE CAST ALUMIUM

- **DRIVER TYPE :** BUILT-IN
- **CHIP TYPE:** SANAN
- **DIFFUSER:** PC



SASO

STEP LIGHT

Sleek and compact LED steplight designed for style, soft, and glare-free illumination for stairs, pathways, and walls, Ideal for both **indoor and outdoor use.**



Power	CCT	CRI	IP	Lumen	PF	Warranty
3w	3000K	80	65	210	≥0.6	2
6w	3000K	80	65	420	≥0.6	2

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** DIE CAST ALUMINIUM

- **DRIVER TYPE :** BUILT-IN
- **CHIP TYPE:** SANAN
- **DIFFUSER:** PC

The SASO logo is displayed in a bold, white, sans-serif font against a dark, textured background that appears to be a close-up of a stone or pebble surface.

LED STRIP

High-Density **100m LED Strip:**
120-240 chips/m for seamless
ambient lighting and maximum
output; **easy to install.**



Power	CCT	CRI	IP	LM\W	Warranty
9-14w/m	3000K - 4000K - 6500K	80	65	85	1

- **MAIN VOLTAGE :** 220 - 240 VAC
- **MAIN FREQUENCY:** 50 \ 60 HZ
- **BODY MATERIAL:** SILICON TUBE

- **DRIVER TYPE :** ELSEWEDY
- **CHIP TYPE:** SANAN
- **DIFFUSER:** SILICON TUBE



SASO

DECORATIVE BOLLARD

Customizable LED Bollard Light (30cm-110cm): High-quality rectangular luminaire. **Any custom shape, design, or wattage** can be fabricated upon request to fit your project.



Power	CCT	CRI	IP	PF
-	3000k - 4000k - 6500k	80	65	≥0.95

- **MAIN VOLTAGE :** 220 - 240 VAC
- **BODY MATERIAL:** ALUMIUM

- **MAIN FREQUENCY:** 50 \ 60 HZ
- **DIFFUSER:** PC



SASO

DECORATIVE POLE

Decorative Lighting Pole**(3m - 6m)**
An attractively shaped luminaire designed for modern **outdoor environments**, featuring a sleek rectangular pillar profile. Engineered as a continuous column (height measured for the column only, excluding the fixture), it incorporates high-quality LED sources and premium drivers to **ensure long-lasting performance and reliable efficiency**.



Power	CCT	CRI	IP	PF
-	3000k - 4000k - 6500k	80	65	≥0.95

- **MAIN VOLTAGE :** 220 - 240 VAC
 - **MAIN FREQUENCY:** 50 \ 60 HZ
 - **BODY MATERIAL:** ALUMIUM
- **DRIVER TYPE :** PHILIPS - ELSEWEDY
 - **CHIP TYPE:** PHILIPS - SANAN
 - **DIFFUSER:** PC



GET IN TOUCH!

LOCATION

22DR SolimanAzmy st.,
Nozha, Cairo, Egypt

WEB

eglight-elsewedy.com

PHONE NUMBER

+20 10 00393917

SOCIAL MEDIA

EG.Light Elsewedy
Advanced Industries